



94 JACKSON ROAD, SUITE 110, DEVENS , M A 0 1 4 3 4

Coaxial Rotary Joints


Model RMRJ.18000Kff

In-line SMA female

Frequency	Insertion Loss	Rotational Effect (WOW)	Rotational Speed (continuous)	VSWR	Starting Torque (max)
DC-18GHz	1dB max	1.01/360deg	100rpm	1.2:1 max	3oz-in

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female stainless/passivate
- Power: 100 W @ 1GHz
- Case material: brass/chrome
- Operation temperature: -35°C to +80°C
- Life tested to over 1 million revolutions

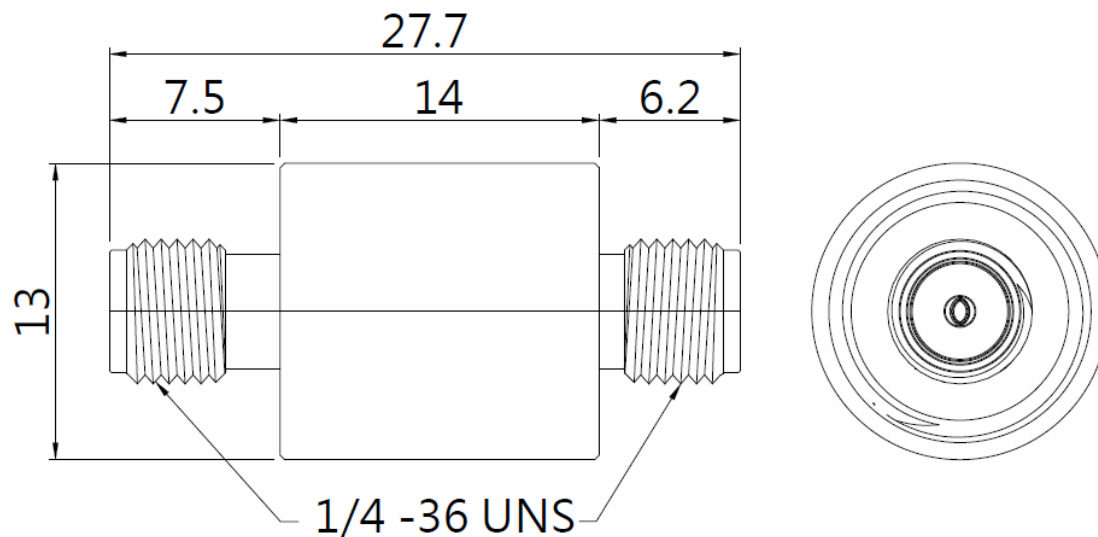

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com