



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## ADAPTORS

### Between Series


Model RMAD.BS.18510mf

1.85mm to 1.0mm male/female

| Frequency  | Insertion Loss                        | Impedance | VSWR        |
|------------|---------------------------------------|-----------|-------------|
| DC – 67GHz | 0.07 f ½ dB<br><i>f=frequency GHz</i> | 50Ω       | 1.25 :1 max |

**Notes:**

- Material:  
Body: SUS303 stainless steel/passivate  
Socket Contacts: BeCu/gold  
Dielectric: PEEK
- Operation temperature: -55°C to +165°C
- Mating torque; 1.0mm =0.45Nm, 1.85mm =0.9Nm

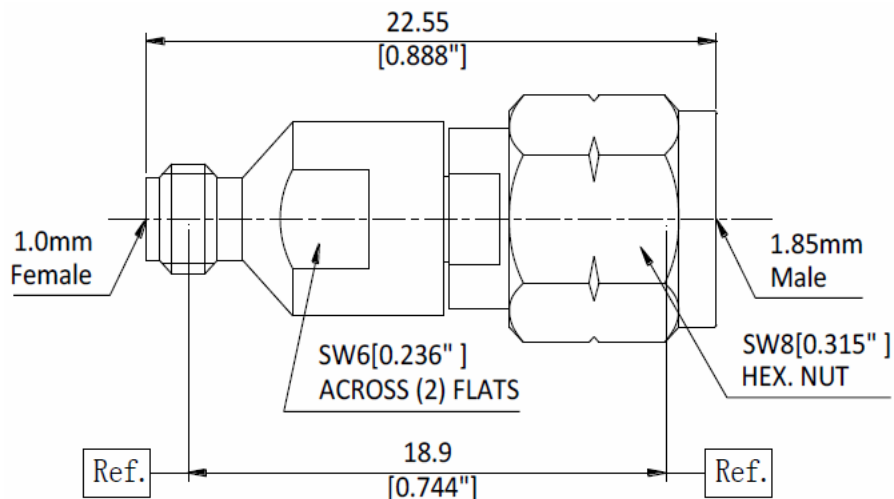

Dimensions are in mm (inches). All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)