



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

Between Series


Model RMAD.BS.18510mm

1.85mm to 1.0mm male/male

Frequency	Insertion Loss	Impedance	VSWR
DC – 67GHz	0.07 f ½ dB <i>f=frequency GHz</i>	50Ω	1.25 :1 max

Notes:

- Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEEK
- Operation temperature: -55°C to +165°C
- Mating torque; 1.0mm =0.45Nm, 1.85mm =0.9Nm

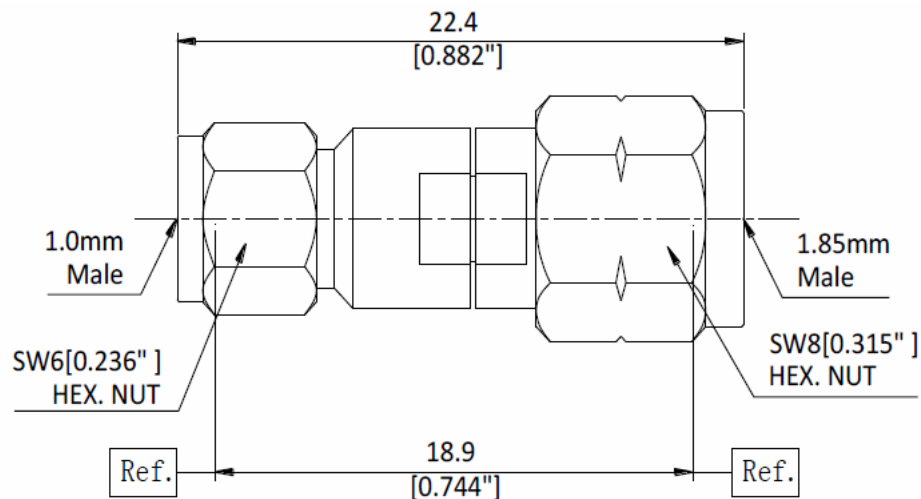

Dimensions are in mm (inches). All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com