94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS
Between Series

Model RMAD.BS.18524fm 1.85mm to 2.4mm female/male

Frequency	Insertion Loss	Impedance	VSWR
DC – 50GHz	0.07 f ½ dB *f=frequency GHz*	50Ω	1.25 :1 max

Notes:

a. **Material:**
   - **Body: SUS303 stainless steel/passivate**
   - **Socket Contacts: BeCu/gold**
   - **Dielectric: PEI**

b. **Operation temperature: -65°C to +105°C**

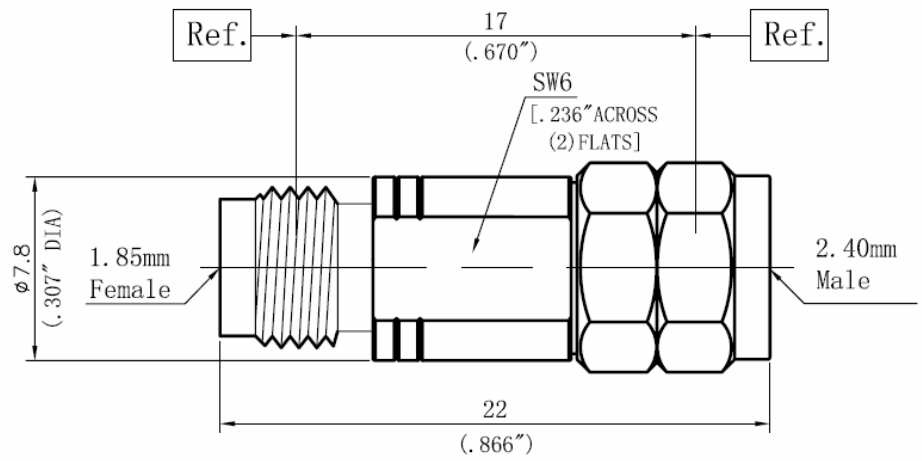

Dimensions are in mm (inches). All specifications subject to change

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com