



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.BS.35SSMAff Between Series 2.4 female/SSMA female

Frequency	Insertion Loss	Impedance	VSWR
DC – 40GHz	0.07 f ¹ / ₂ dB <i>f</i> =frequency GHz	50ohms	1.20 :1 max

Notes:

- Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature: -65C to +105C deg

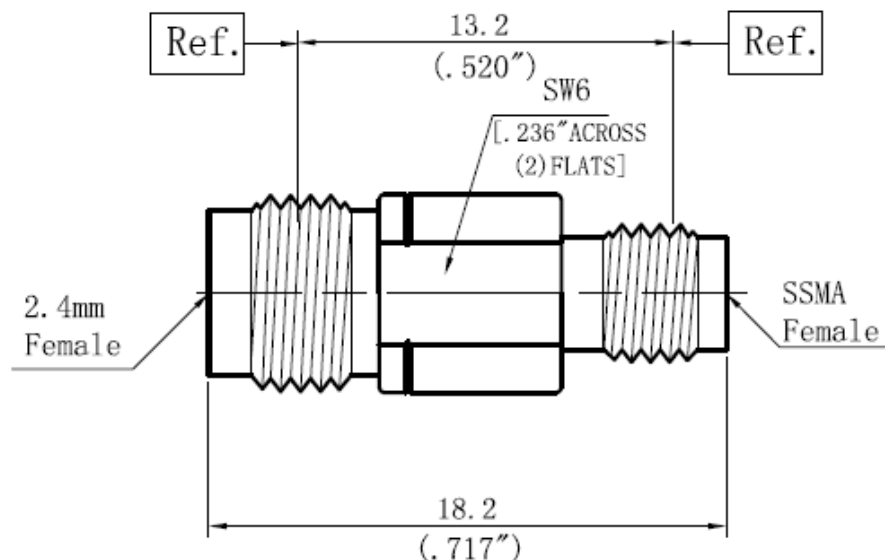

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com