



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.BS.35SSMAfm **Between Series 2.4 female/SSMA male**

Frequency	Insertion Loss	Impedance	VSWR
DC – 40GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50ohms	1.20 :1 max

Notes:

- a. Material:
 Body: SUS303 stainless steel/passivate
 Socket Contacts: BeCu/gold
 Dielectric: PEI
- b. Operation temperature: -65C to +105C deg

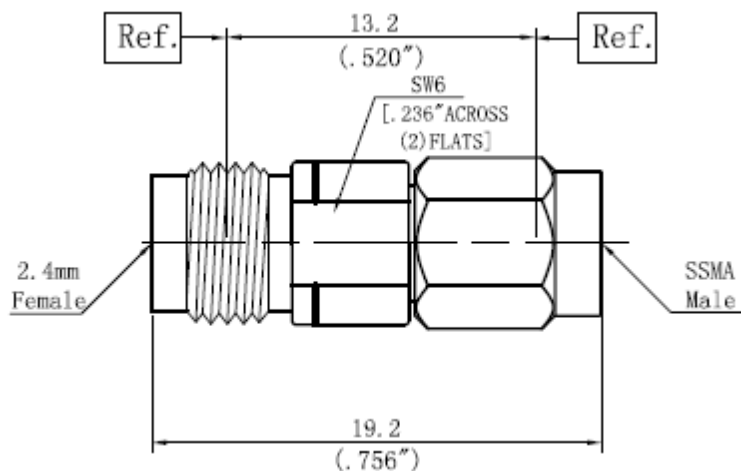

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com