



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## ADAPTORS

### Between Series


Model RMAD.BS.292SMPMfm

2.9mm to SMPM

| Frequency  | Insertion Loss                                                  | Impedance | VSWR       |
|------------|-----------------------------------------------------------------|-----------|------------|
| DC – 40GHz | 0.07 f <sup>1</sup> / <sub>2</sub> dB<br><i>f=frequency GHz</i> | 50Ω       | 1.30:1 max |

**Notes:**

- Material:  
Body: SUS303 stainless steel/passivate  
Socket Contacts: BeCu/gold  
Dielectric: PEI
- Operation temperature: -65°C to +125°C
- Detent: smooth bore

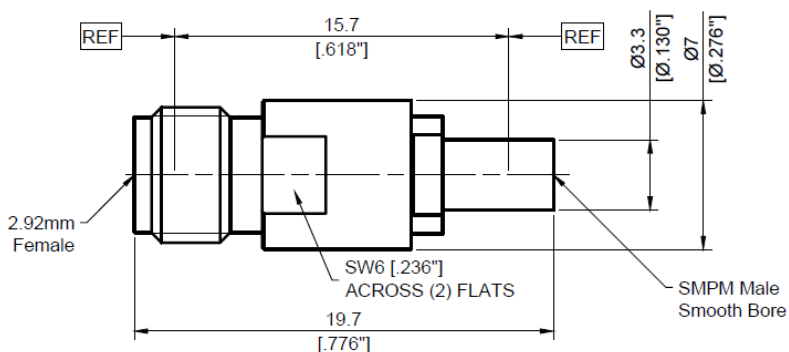

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)