



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

Between Series


Model RMAD.BS.292SMPMmmX*

2.9mm to SMPM

Frequency	Insertion Loss	Impedance	VSWR
DC – 40GHz	0.07 f ½ dB <i>f=frequency GHz</i>	50Ω	1.30:1 typ 1.50:1 max

Notes:

- Material:**
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature:** -65°C to +125°C
- *Add suffix for detent:** F = full, S = smooth bore

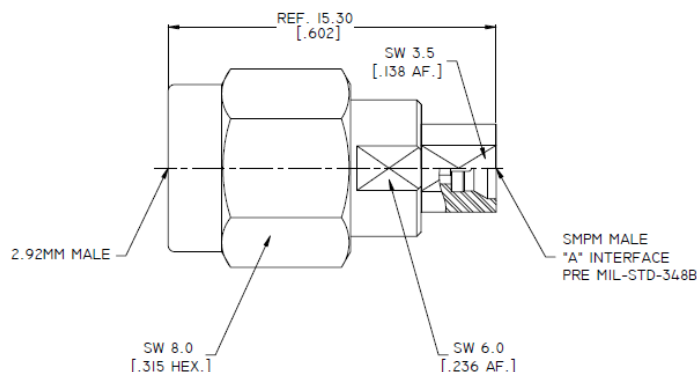

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com