



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.BS.3524mf Between Series – 3.5 to 2.4 male/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 33GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50Ω	1.15 :1 max

Notes:

- a. Material:
 Body: SUS303 stainless steel/passivate
 Socket Contacts: BeCu/gold
 Dielectric: PEI
- b. Operation temperature: -65°C to +105°C

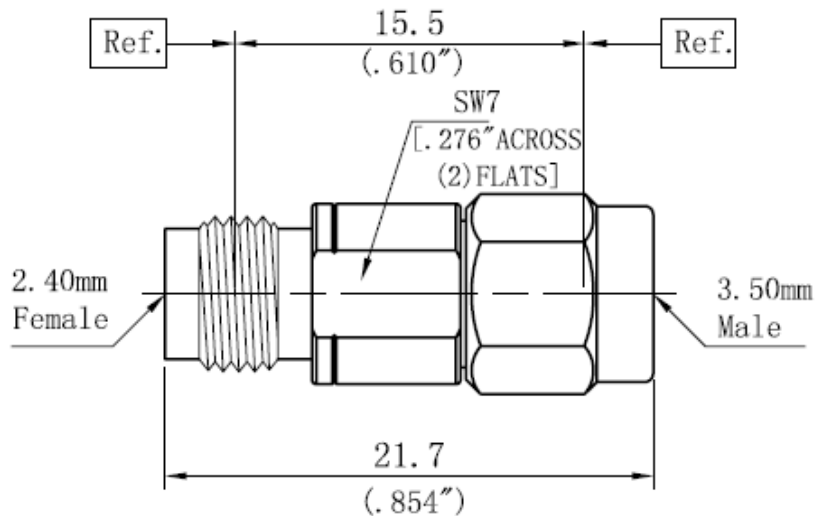

Dimensions are in mm (inches). All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com