



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

Between Series


Model RMAD.BS.35292ff

3.5mm to 2.92mm female/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 33GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50Ω	1.15 :1 max

Notes:

- a. Material:
 - Body: SUS303 stainless steel/passivate
 - Socket Contacts: BeCu/gold
 - Dielectric: PEI
- b. Operation temperature: -65°C to +105°C

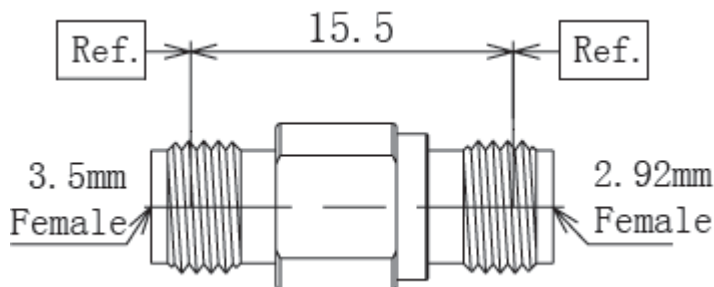

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com