94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

# ADAPTORS

## Model RMAD.BS.35292fm Between Series – 3.5 to 2.92 female/male

| Frequency | Insertion Loss | Impedance | VSWR |
|---|---|---|---|
| DC – 33GHz | 0.07 f ½ dB<br>*f=frequency GHz* | 50Ω | 1.15 :1 max |

**Notes:**

a. **Material:**
   **Body: SUS303 stainless steel/passivate**
   **Socket Contacts: BeCu/gold**
   **Dielectric: PEI**

b. **Operation temperature: -65°C to +105°C**

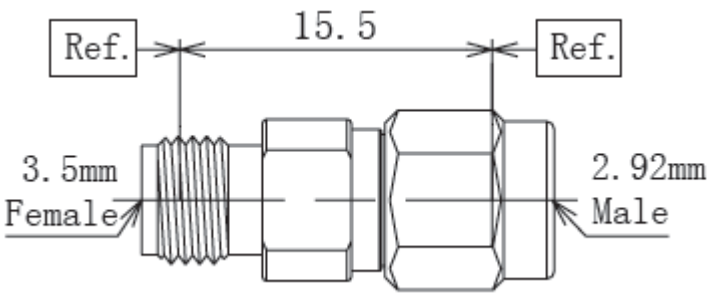


*Dimensions are in mm. All specifications subject to change*

**Telephone: 978-772-3767** **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 11/25/07