94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

Model RMAD.BS.35292mf Between Series – 3.5 to 2.92 male/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 33GHz	0.07 f ½ dB *f=frequency GHz*	50ohms	1.15 :1 max

Notes:

a. **Material:**
   Body: SUS303 stainless steel/passivate
   Socket Contacts: BeCu/gold
   Dielectric: PEI
b. **Operation temperature: -65C to +105C deg**

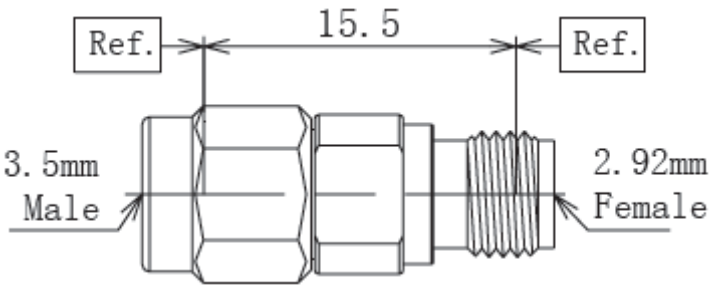

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com