



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.BS.4310Nmf Between Series – 4.3/10 to N male/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 6GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50Ω	1.30:1 max

Notes:

- Material:
 Body: brass/silver
 Socket Contacts: BeCu/silver
 Dielectric: PTFE
 O-ring: Silicon rubber
- Operation temperature: -65°C to +105°C

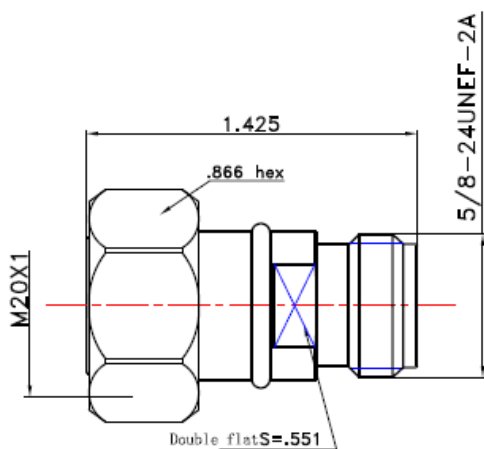

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com