



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

Between Series


Model RMAD.BS.4310NmfRA

4.3/10 to N male/female R/A

Frequency	Insertion Loss	Impedance	VSWR
DC – 3GHz	0.2dB max	50Ω	1.30:1 max

Notes:

- Material: see table below
- Operation temperature: -65°C to +105°C
- RoHS compliant

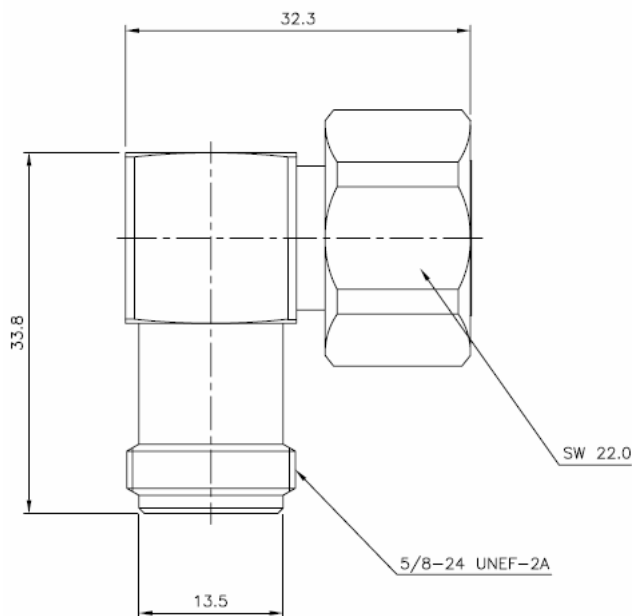

9	SPRING RING	1	PBR	Nickel Plate
8	COVER	1	MBsBD C3604BD-F	SUCC Plate (3um)
7	CAP	1	MBsBD C3604BD-F	Nickel Plate
6	INSULATOR	1	TEFLON	
5	INSULATOR	1	TEFLON	
4	GASKET	1	SILICONE RUB	
3	CONTACT	1	MBsBD C3604BD-F	Silver Plate (3um)
2	CONTACT	1	BeCu C17300	Silver Plate (3um)
1-2	BODY (B)	1	MBsBD C3604BD-F	SUCC Plate (3um)
1-1	BODY (A)	1	MBsBD C3604BD-F	SUCC Plate (3um)
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com