94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

Model RMAD.BS.716PNmf Between Series

Frequency	Power	Impedance	VSWR	Insertion Loss
DC – 5GHz	200 W	50Ω	1.2:1 max	0.3dB max

Notes:

a. **Material:**
   Body: brass/ternary alloy plated
   Inner Contact: BeCu/silver plated
   Outer Contact: brass/silver plated
   Insulator: PTFE

b. **Operation temperature: -35°C to +80°C**

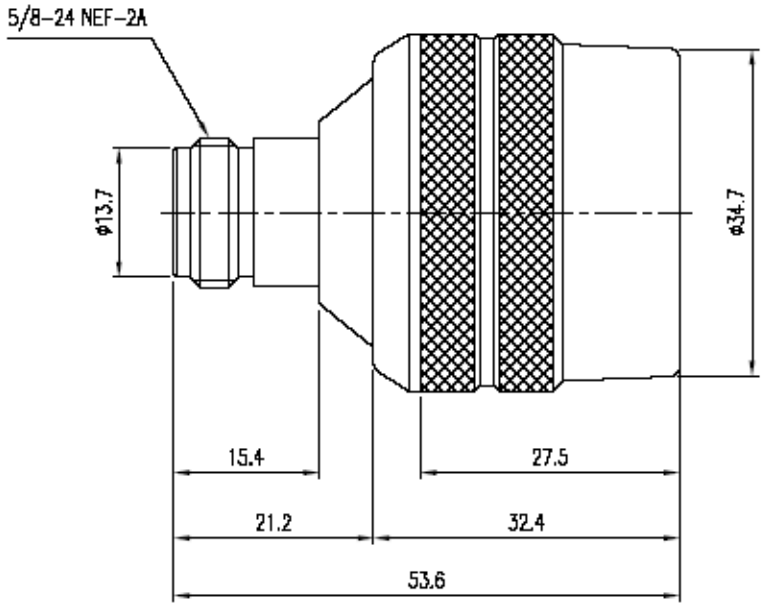

Dimensions in mm. All specifications subject to change.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 7/25/05