



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


## ADAPTORS

**Model RMAD.BS.735ff     Between Series – 7mm to 3.5mm female/female**

| Frequency  | Insertion Loss                              | Impedance | VSWR        |
|------------|---------------------------------------------|-----------|-------------|
| DC – 18GHz | $0.07 f^{1/2}$ dB<br><i>f=frequency GHz</i> | 50ohms    | 1.10 :1 max |

### Notes:

- Material:  
Body: SUS303 stainless steel/passivate  
Socket Contacts: BeCu/gold  
Dielectric: PEI
- Operation temperature: -65C to +105C deg

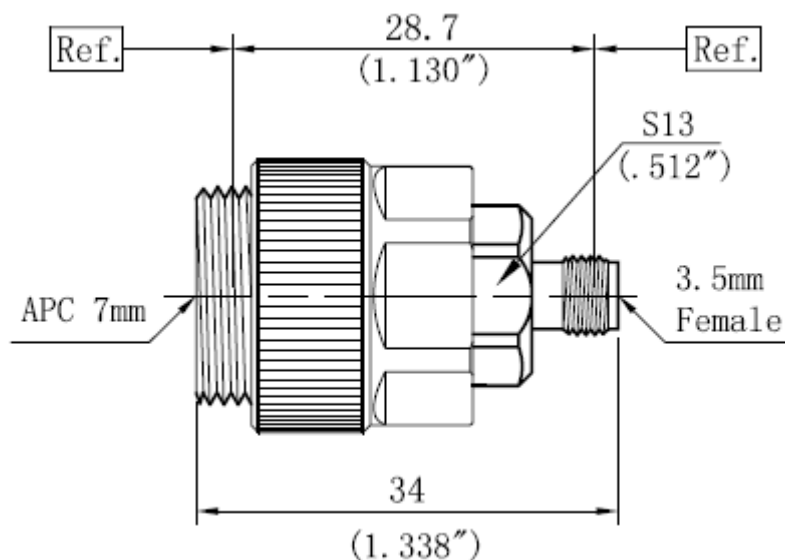

*Dimensions are in mm. All specifications subject to change*

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)