



94 Jackson Road, Devens, MA 01434-4012 USA


ADAPTORS

Model RMAD.BS.FMESMAfm-TGN Between Series FME to SMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 3GHz	0.7dB	50ohms	1.3:1

Notes:

- Material:
 Body: brass/nickel
 Contacts: BeCu/gold
 Dielectric: PTFE
 Gasket: silicon
 Spring Ring: Stainless/passivate
- Operation temperature: -55C to +85C deg
- RoHS Compliant

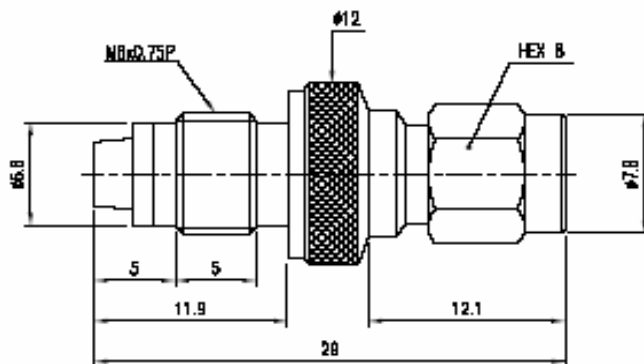

All specifications are subject to change without notice.