



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Between Series

Model RMAD.BS.N18SMA27ff4HF N female to SMA female 4HF

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50Ω	1.15 :1 max

Notes:

- Material:**
 Body: SUS303 stainless steel/passivate
 Socket Contacts: BeCu/gold
 Dielectric: PEI
- Operation temperature: -65°C to +105°C**

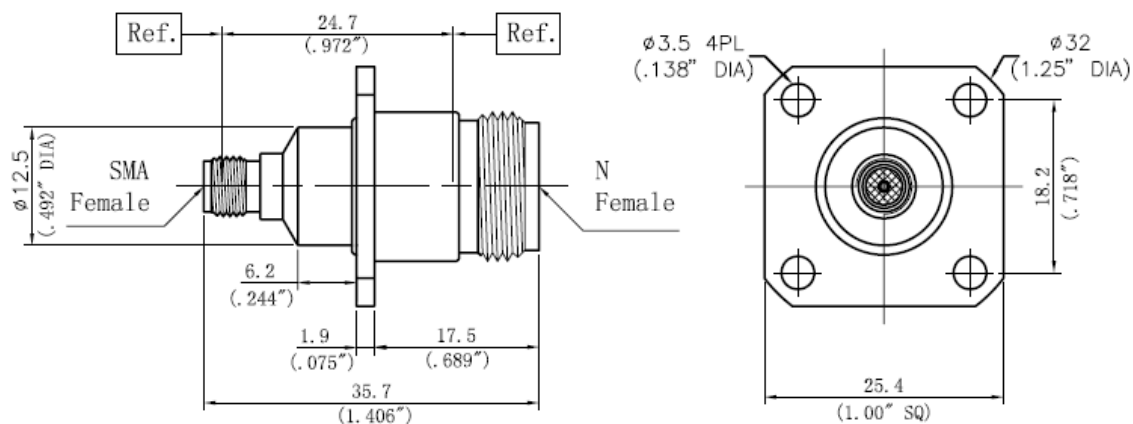

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767 www.responsemicrowave.com Fax: 978-772-3768