



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.BS.N18SMA27fm Between Series – Nfemale to SMAmale

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50 Ω	1.15 :1 max

Notes:

- a. Material:
 - Body: SUS303 stainless steel/passivate
 - Socket Contacts: BeCu/gold
 - Dielectric: PEI
- b. Operation temperature: -65°C to +105°C

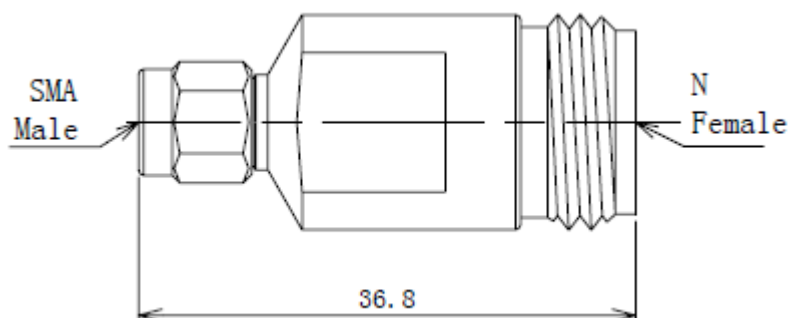

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767 www.responsemicrowave.com Fax: 978-772-3768