



9 4 J A C K S O N R O A D, S U I T E 1 1 0, D E V E N S, M A 0 1 4 3 4


ADAPTORS

Model RMAD.BS.N18SMA27mf Between Series – Nmale to SMAfemale

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50Ω	1.15 :1 max

Notes:

- Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature: -65°C to +105°C

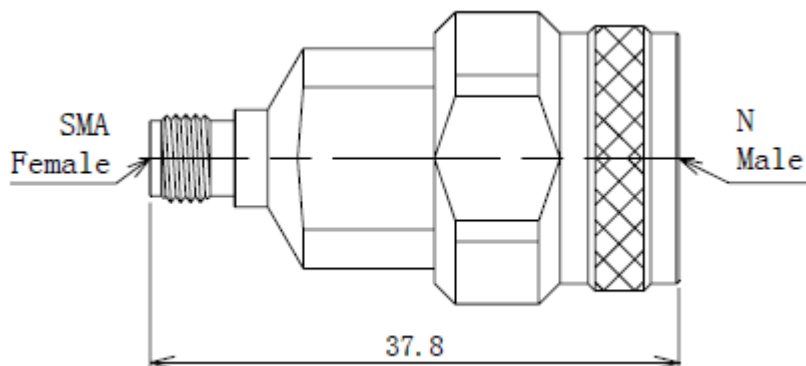

Dimensions are in mm. All specifications subject to change

Telephone:978-772-3767 www.responsemicrowave.com Fax:978-772-3768