



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.BS.N18SMA27mm Between Series – Nmale to SMAmale

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50Ω	1.15 :1 max

Notes:

- Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature: -65°C to +105°C deg

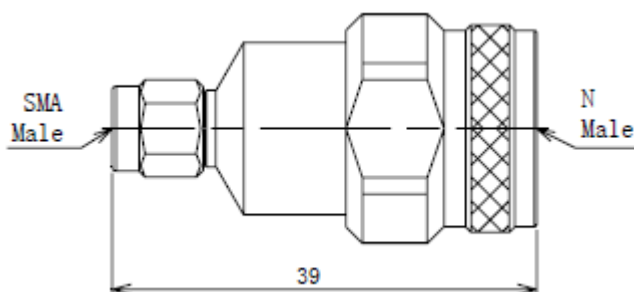

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767 www.responsemicrowave.com Fax: 978-772-3768