



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.BS.N716ff

Between Series – N female 7/16 female

Frequency	Insertion Loss	Impedance	VSWR
DC – 6GHz	0.4dB min	50 Ω	1.20:1 max

Notes:

- Material:
Body: brass/ternary alloy
Socket Contacts: Brass/gold & silver
- Operation temperature: -65°C to +105°C
- Interface: per MIL-C-39012 & IEC169-15

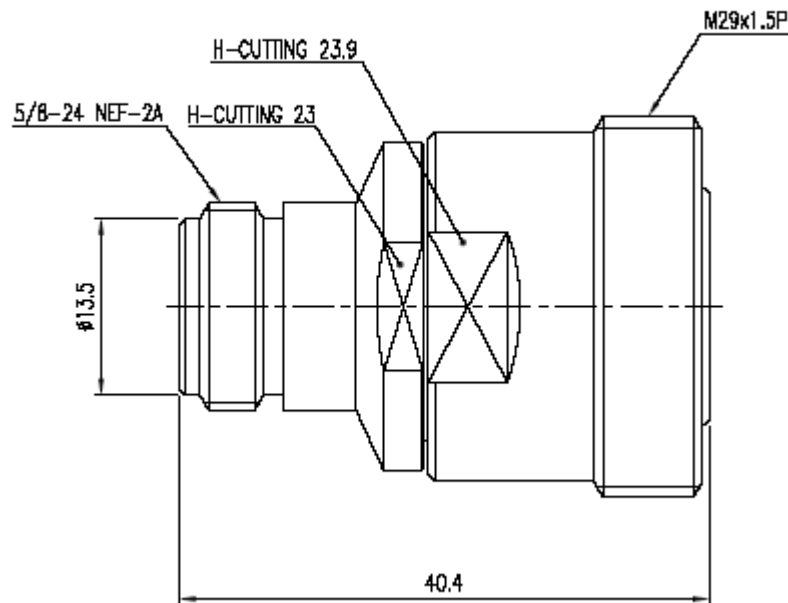

All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com