94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

Model RMAD.BS.N716mf Between Series – N male 7/16 female

Frequency	Insertion Loss	Impedance	VSWR
DC – 6GHz	0.4dB min	50ohms	1.20:1 max

Notes:

a. **Material:**
   Body: brass/ternary alloy
   Socket Contacts: Brass/gold & silver
b. **Operation temperature: -65C to +105C deg**
c. **Interface: per MIL-C-39012 & IEC169-15**
d. **N male coupling nut can also be hex**

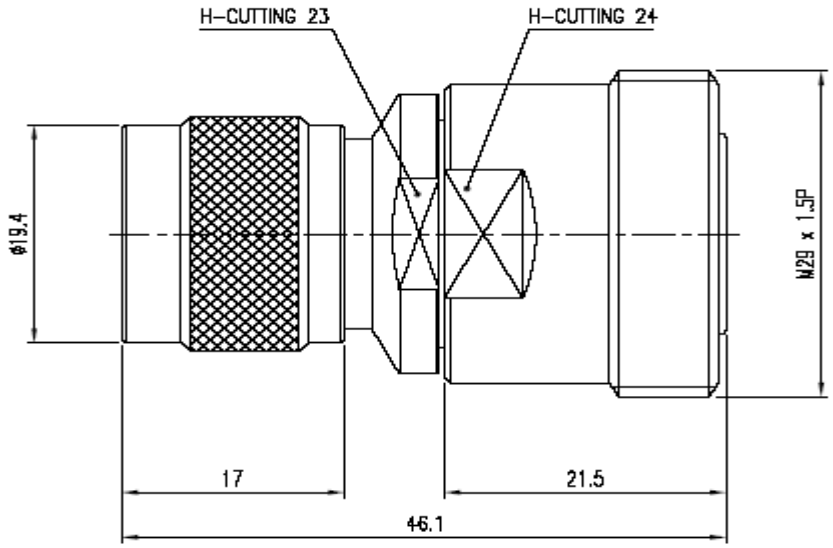

All specification s subject to change

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 7/25/05