



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.BS.N716mm

Between Series – N male 7/16 male

Frequency	Insertion Loss	Impedance	VSWR
DC – 6GHz	0.4dB min	50ohms	1.20:1 max

Notes:

- Material:
Body: brass/ternary alloy
Socket Contacts: Brass/gold & silver
- Operation temperature: -65C to +105C deg
- Interface: per MIL-C-39012 & IEC169-15
- Coupling nut can be either hex or knurl

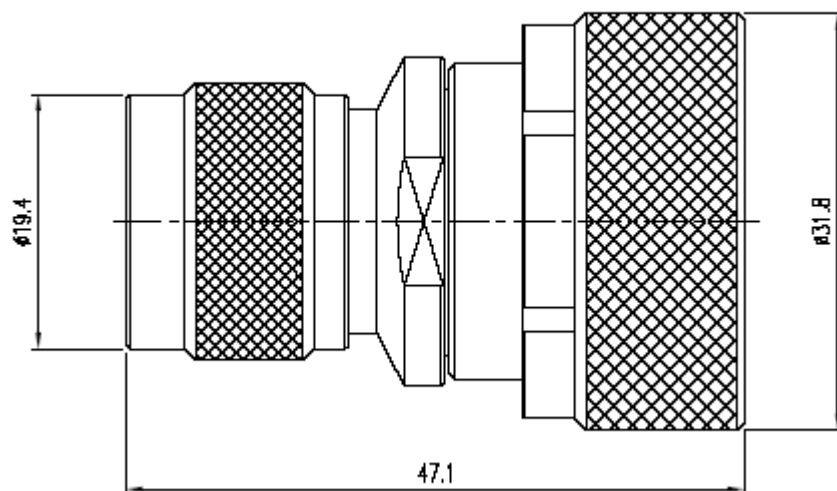

All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com