



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

Between Series


Model RMAD.BS.NFmf75

N male to F female

Frequency	Insertion Loss	Impedance	VSWR
DC – 1GHz	0.3db max	75 Ω	1.05 + 0.005 f (GHz)

Notes:

- Material:**
Body: brass/nickel
Contacts: BeCu/gold
Gasket: Silicon
Insulator: PTFE
- Operation temperature:** -65°C to +85°C

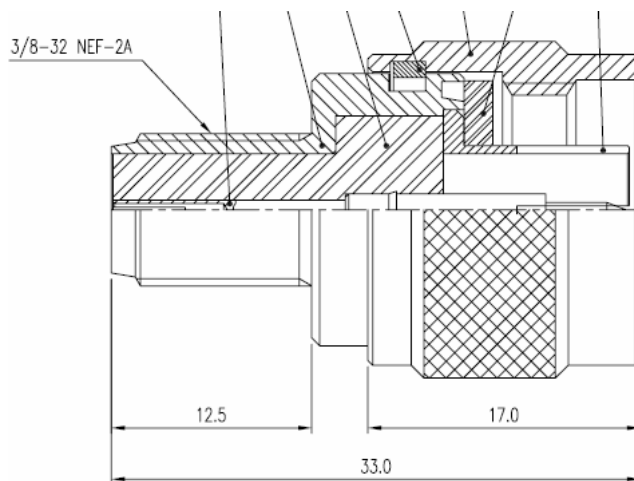

Dimensions in mm. All specifications subject to change.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com