



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.BS.NMD18524ff

Between Series

Frequency	Insertion Loss	Impedance	VSWR
DC – 50GHz	0.48dB max	50 Ω	1.25 :1 max

Notes:

- Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
- Operational temperature: -0°C to +85°C
- Recommended torque; NMD1.85mm = 0.9Nm, 2.4mm = 0.9Nm

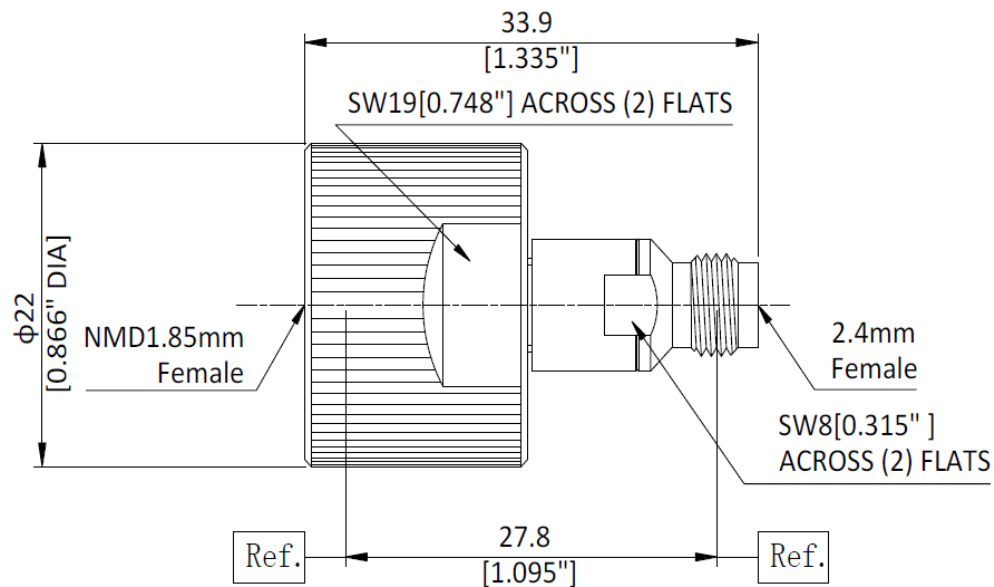

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com