



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## ADAPTORS


Model RMAD.BS.NMD2929fm

Between Series

| Frequency  | Insertion Loss | Impedance   | VSWR       |
|------------|----------------|-------------|------------|
| DC – 40GHz | 0.25dB max     | 50 $\Omega$ | 1.20:1 max |

**Notes:**

- a. Material:  
Body: SUS303 stainless steel/passivate  
Socket Contacts: BeCu/gold
- C. Operational temperature: -55°C to +165°C
- D. Recommended torque; Male = 0.9Nm

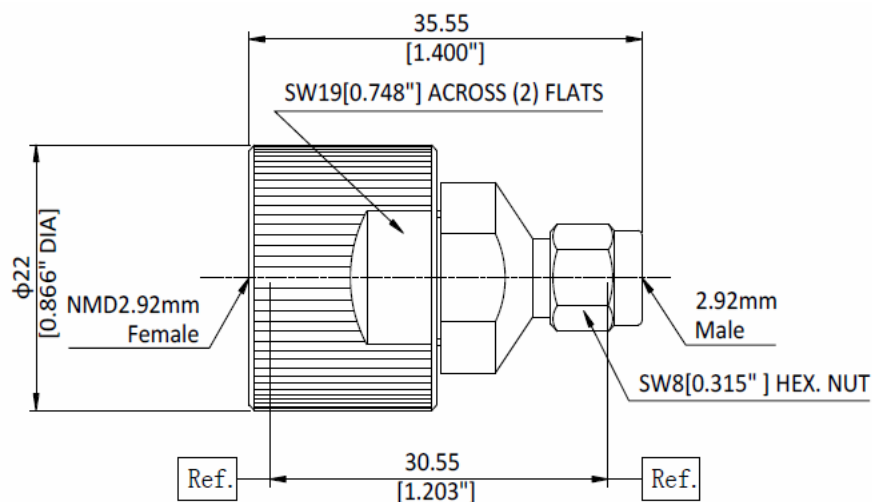

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)