



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.BS.NMD29NMD35fm

Between Series

Frequency	Insertion Loss	Impedance	VSWR
DC – 26.5GHz	0.25dB max	50ohms	1.15 :1 max

Notes:

- a. Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
- C. Operational temperature: -0°C to +85°C
- D. Recommended torque; Male = 1.35 – 2Nm

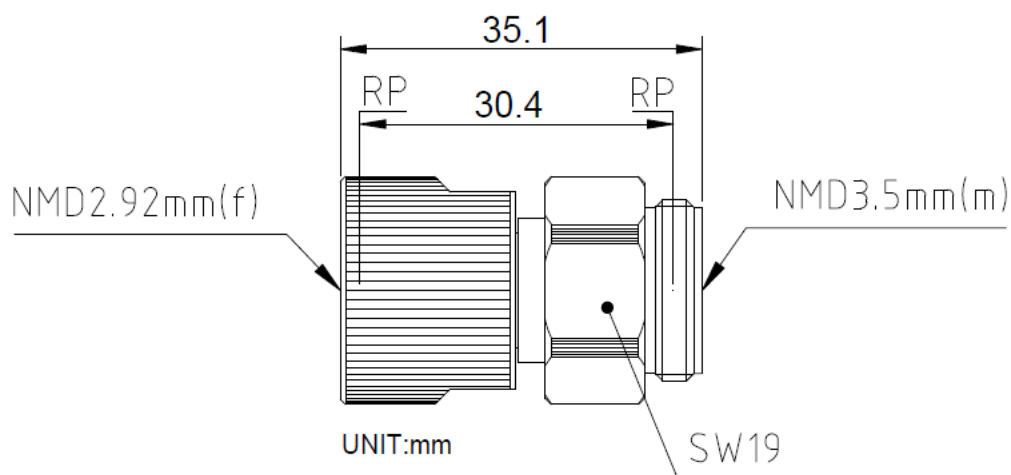

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com