



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.NSffBa

Between Series - N to SMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 12GHz	0.5dB typ	50ohms	1.2:1 max

Notes:

- Material:
Body: brass/nickel
Contacts: BeCu/gold
Dielectric: PTFE
Gasket: silicon
- Operation temperature: -55C to +85C deg
- Interface: per MIL-C-83517

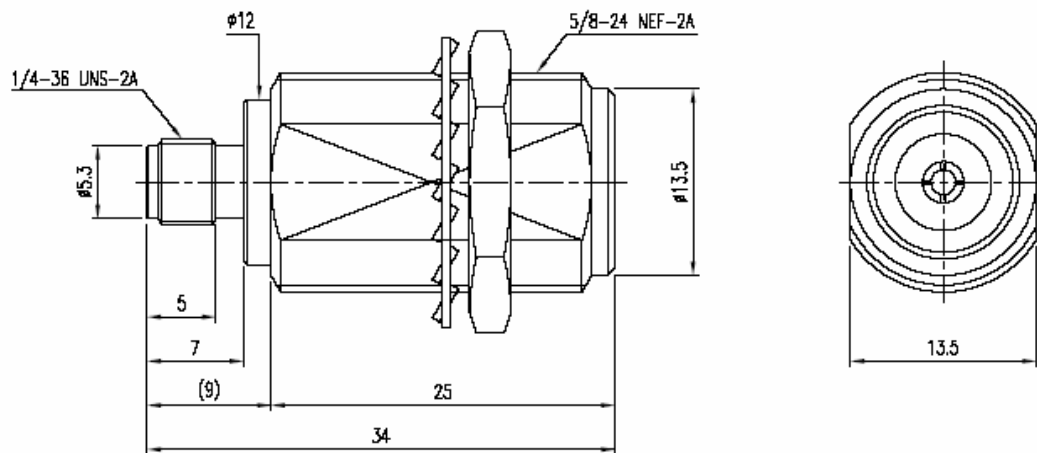

All specifications are subject to change without notice.