



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

RNMD Series


Model RMAD.BS.RNMD35mf

Between Series

Frequency	Insertion Loss	Impedance	VSWR
DC – 26.5GHz	0.35dB max	50 Ω	1.25 :1 max

Notes:

- Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEEK
- Operational temperature: -55°C to +165°C
- Recommended torque; RNMD male: 1.35Nm, 3.5mm female: 0.9Nm

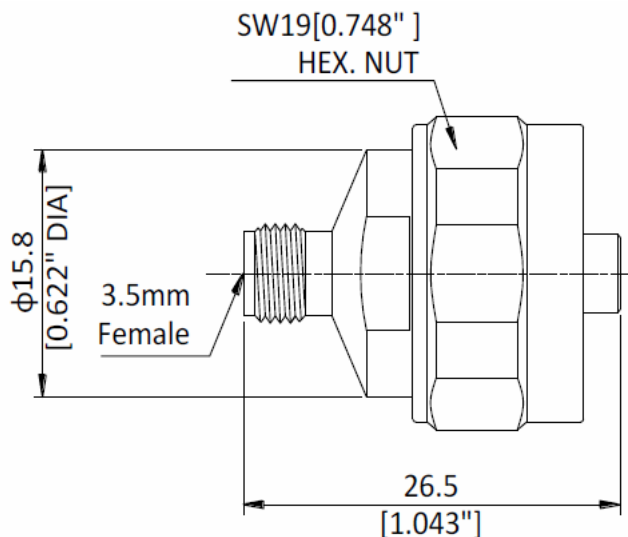

Dimensions are in mm (inches). All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com