



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.BS.SMASSMAfma

Between Series – SMA to SSMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 27GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50Ω	1.15:1 max

Notes:

- a. Material:
 - Body: SU303F stainless steel/passivate
 - Coupling Nut: SU303F stainless steel/passivate
 - Contact: BeCu/gold
 - Insulator: PTFE
 - Gasket: Silicone Rubber
- b. Operation temperature: -25°C to +85°C

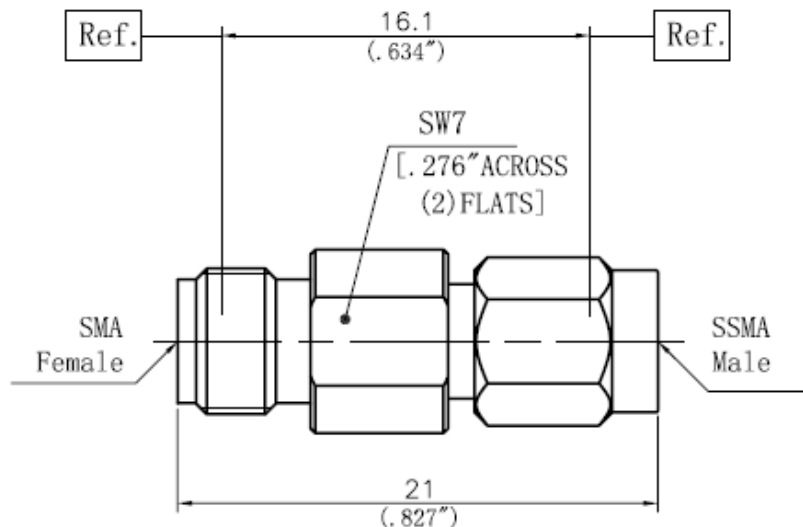

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com