



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.SMABNCff

Between Series – SMA to BNC

Frequency	Insertion Loss	Impedance	VSWR
DC – 4GHz	0.5dB typ	50Ω	1.3:1 max

Notes:

- a. **Material:**
 Body: brass/nickel
 Contacts: BeCu/gold
 Dielectric: PTFE
 Gasket: silicon
- b. **Operation temperature:** -55°C to +85°C
- c. **RoHS Complaint**

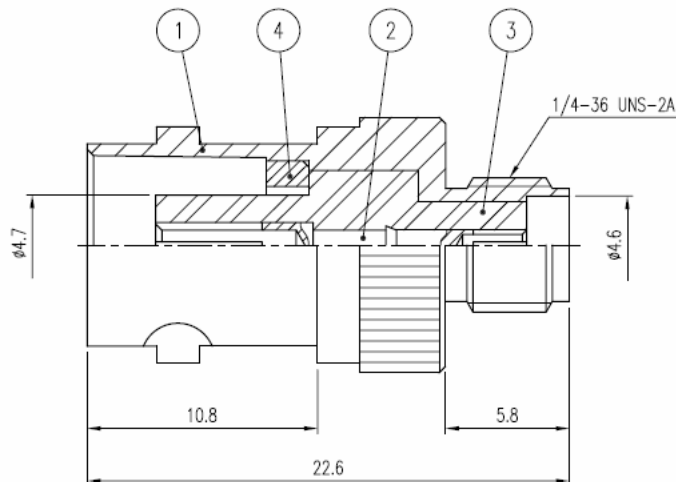

Item	Description	Material
1	Body, outer	Brass/nickel
2	Contact, center	BeCu/gold
3	Insulator	PTFE
4	Body, inner cover	Brass/nickel

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

02/12/12