



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.SMABNCffBH_a

Between Series - BNC to SMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 6GHz	0.3dB max	50Ω	1.25:1 max

Notes:

- a. Material:
 Body: brass/nickel
 Contacts: BeCu/gold
 Dielectric: PTFE
 Nut: Brass/nickel
 Washer: Brass/nickel
- b. Operation temperature: -55°C to +85°C
- c. Interface: per MIL-C-83517

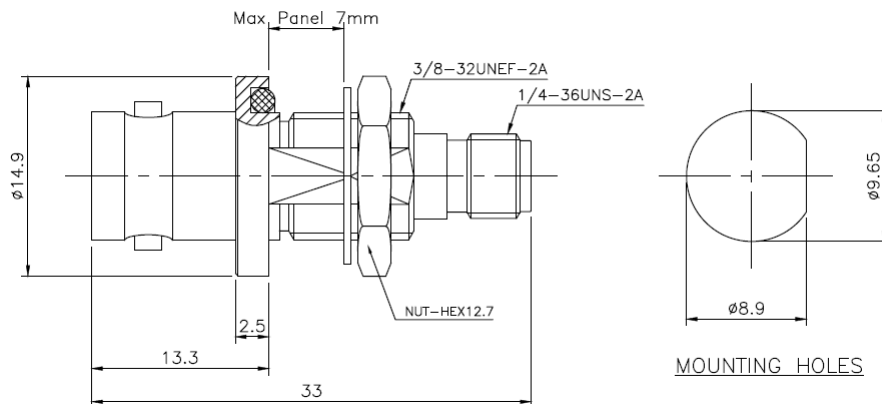

All specifications are subject to change without notice.