



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.SMABNCfm

Between Series – SMA to BNC

Frequency	Insertion Loss	Impedance	VSWR
DC – 4GHz	0.5dB typ	50ohms	1.2:1 max

Notes:

- a. Material:
 - Body: brass/nickel
 - Contacts: BeCu/gold
 - Dielectric: PTFE
 - Gasket: silicon
- b. Operation temperature: -55C to +85C deg
- c. *RoHS Complaint*

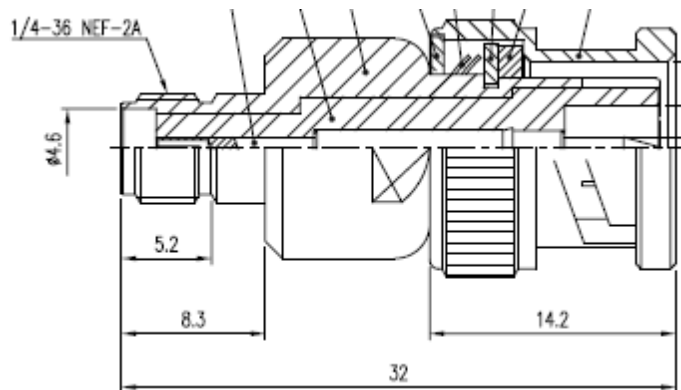

All specifications are subject to change without notice.