



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.BS.SMABNCmf

Between Series – SMA to BNC

Frequency	Insertion Loss	Impedance	VSWR
DC – 8GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50ohms	$1.05 + 0.005 f$ (GHz)

Notes:

- a. Material:
 - Body: brass/nickel
 - Socket Contacts: BeCu/gold
- b. Operation temperature: -65C to +105C deg

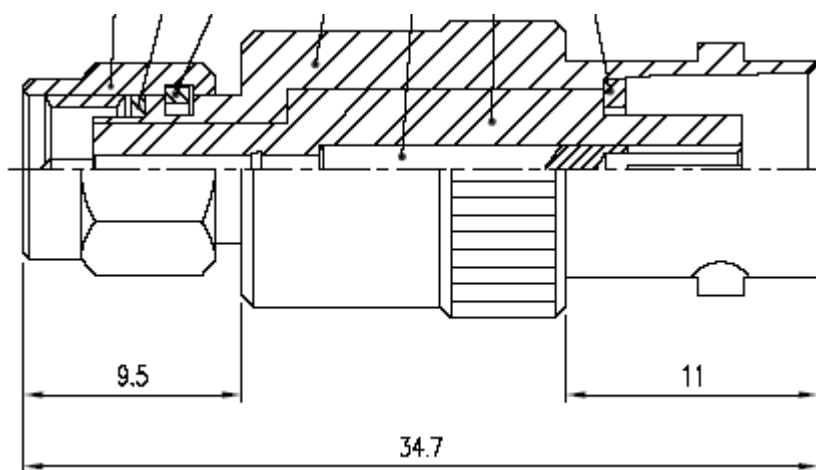

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com