



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS Between Series


Model RMAD.BS.SMAMCXfmRA

SMA to MCX R/A

Frequency	Insertion Loss	Impedance	VSWR
DC – 3GHz	0.2dB typ	50 Ω	1.2:1 max

Notes:

- a. Material:
 - Body: brass/nickel
 - Contacts: BeCu/gold
 - Dielectric: PTFE
 - Gasket: silicon
- b. Operation temperature: -55°C to +85°C
- c. *RoHS Complaint*

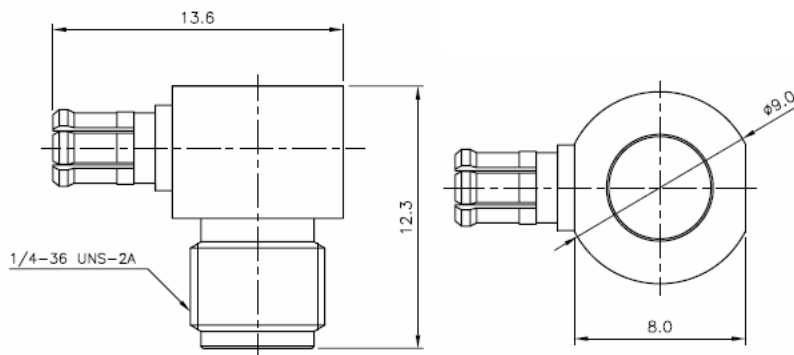

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 9/12/15