



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.SMAN18ffBH

Between Series - N to SMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.5dB typ	50 Ω	1.15:1 max

Notes:

- a. Material:
 - 1 = Body: SUS303/passivate
 - 2 = Contacts: BeCu/gold
 - 3 = Dielectric: PTFE
 - 4 = Nut: SUS303/passivate
 - 5 = Washer: SUS303/passivate
- b. Operation temperature: -55°C to +85°C
- c. Interface: per MIL-C-83517

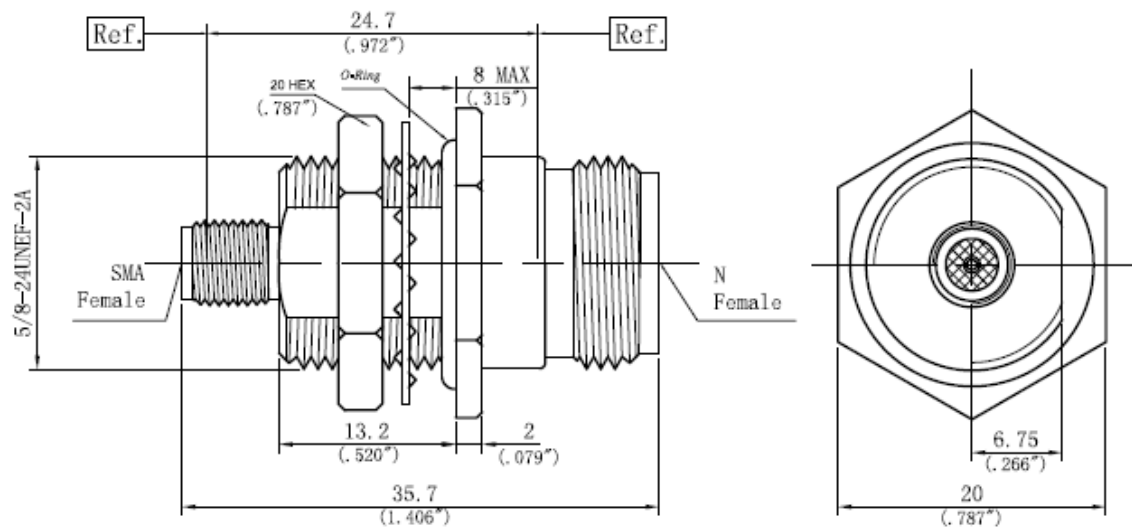

Dimensions in mm. All specifications are subject to change without notice.