



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.SMAnff4HF

Between Series – SMA to N

Frequency	Insertion Loss	Impedance	VSWR
DC – 6GHz	0.6dB typ	50Ω	1.20:1 max

Notes:

- a. Material:
 - 1= Body inner: brass/nickel
 - 2= Contact: BeCu/gold
 - 3= Dielectric: PTFE
 - 4= O-ring: silicon rubber
 - 5= End cap: plastic
- b. Operation temperature: -55°C to +85°C
- c. *RoHS Complaint*

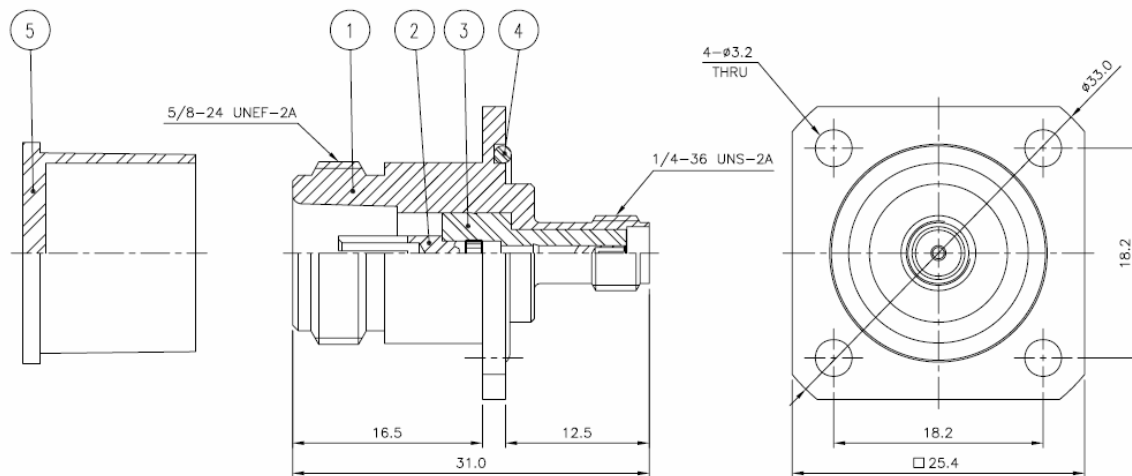

Dimensions in mm. All specifications are subject to change without notice.