94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS

Model RMAD.BS.SMANfm Between Series - N to SMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 12GHz	0.5dB	50ohms	1.2:1

Notes:

a. Material:
   - Body: brass/nickel
   - Contacts: BeCu/gold
   - Dielectric: PTFE
   - Gasket: silicon

b. Operation temperature: -55C to +85C deg

c. Interface: per MIL-C-83517

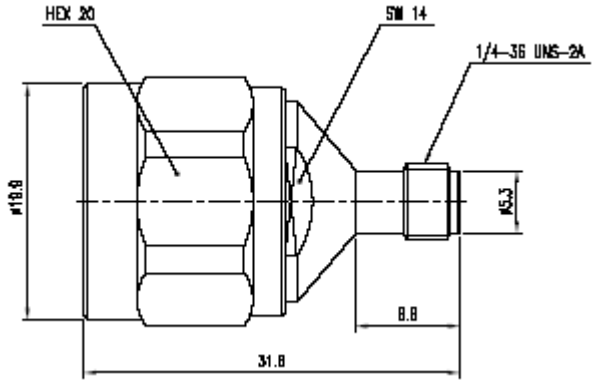

All specifications are subject to change without notice.

Telephone: 978-772-3767 Fax: 978-772-3768
www.responsemicrowave.com