



94 Jackson Road, Devens, MA 01434-4012 USA


ADAPTORS

Model RMAD.BS.SMATNCff4HFb Between Series - TNC to SMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.5dB typ	50 Ω	1.15:1 max

Notes:

- a. Material:
 - 1 = Body: SUS303 Stainless steel/passivate
 - 2 = Contacts: BeCu/gold
 - 3 = Dielectric: PTFE
- b. Operation temperature: -55°C to +85°C
- c. Interface: per MIL-C-83517

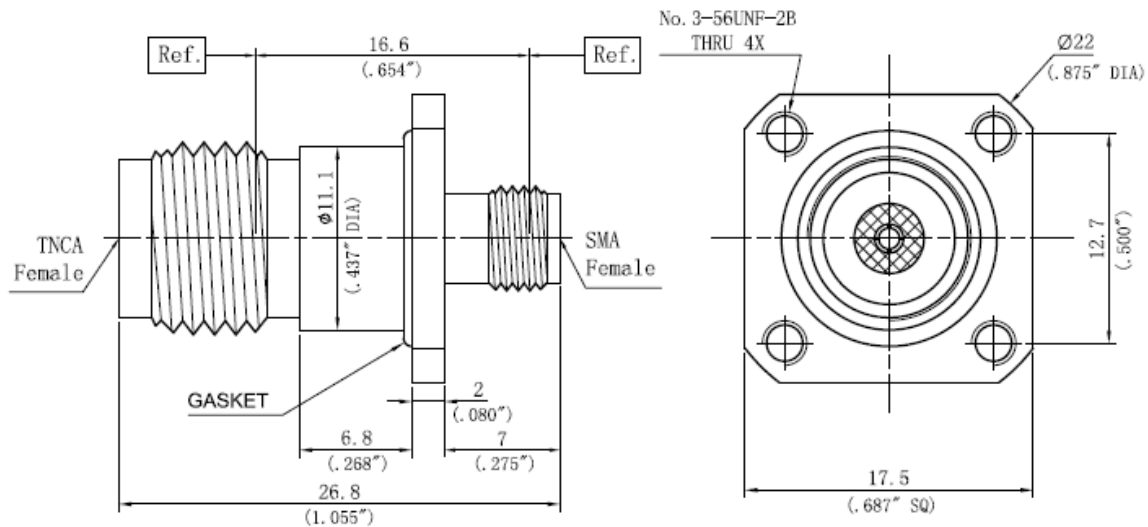

All specifications are subject to change without notice.