



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.SMATNCmfBH

Between Series - SMA to TNC

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.5dB typ	50ohms	1.15:1 max

Notes:

- Material:
Body: SUS303/passivated & polished
Contacts: BeCu/gold
Dielectric: PTFE
- Operation temperature: -55C to +85C deg
- Interface: per MIL-C-83517

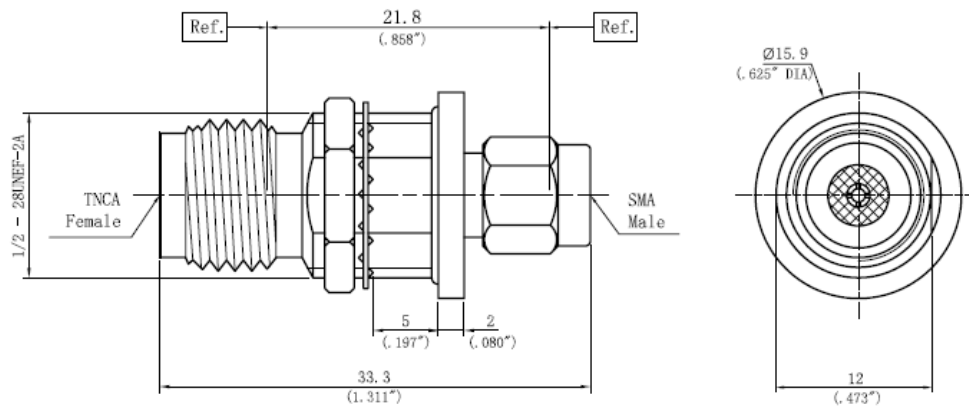

Dimensions in mm. All specifications are subject to change without notice.