



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.BS.SMAUFLf Between Series – SMAfemale/U.FI female

Frequency	Insertion Loss	Impedance	VSWR
DC – 4GHz	0.09 f ¹ / ₂ dB <i>f</i> =frequency GHz	50Ω	1.20 :1 max

Notes:

- Material:
Body: brass/gold
Socket Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature: -65°C to +105°C

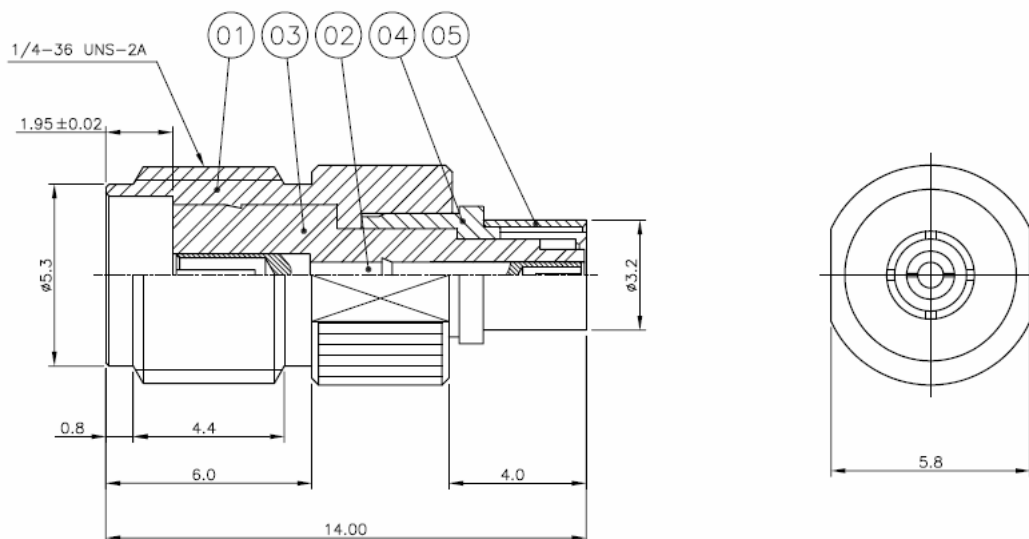

Dimensions are in mm. All specifications subject to change

ITEM	DESCRIPTION	MATERIAL/PLATE
01	Body	Brass/nickel
02	Contact	BeCu/gold
03	Insulator	PTFE
04	Inner Body	BeCu/nickel
05	Body caplock	Brass/nickel

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com