94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS

Model RMAD.BS.SMP6SMAmf2HFax Between Series – SMP to SMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 6GHz	0.15+0.02xF(GHz)dB max	50Ω	1.20:1 max

Notes:

a. **Material:**
   Body: brass/gold
   Contacts: BeCu/gold
   Dielectric: PTFE
b. **Operation temperature: -65°C to +165°C**
c. **Mating Cycles: 100min**
d. **Add P/N Suffix: F = Full detent, L = Limited detent, S = Smooth bore**
e. ***RoHS Complaint***

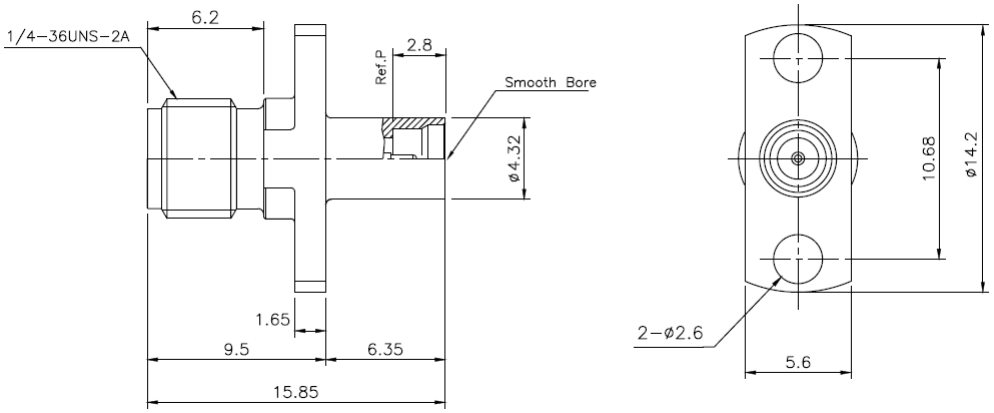

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com