



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.SMPSMAff

Between Series – SMP to SMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 27GHz	0.6dB typ	50Ω	1.35:1 max

Notes:

- Material:**
Body: stainless steel/passivate
Contacts: BeCu/gold
Dielectric: PTFE
- Operation temperature:** -55°C to +85°C
- RoHS Complaint**

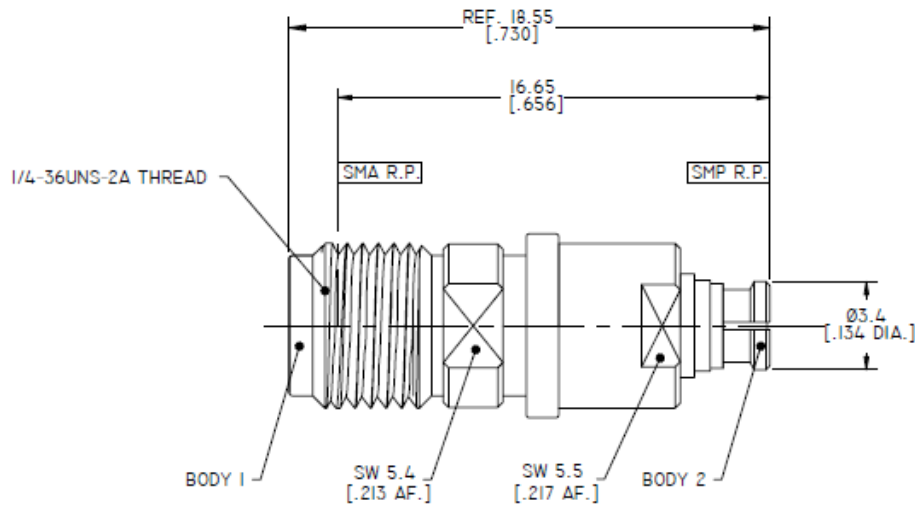

Dimensions in mm. All specifications are subject to change without notice.