



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.SMPSMAffRA

Between Series – SMP to SMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.9dB typ	50 Ω	1.30:1 max

Notes:

- a. **Material:**
 - Body: stainless steel/passivate
 - Contacts: BeCu/gold
 - Dielectric: PTFE
- b. **Operation temperature:** -55°C to +85°C
- c. **RoHS Complaint**

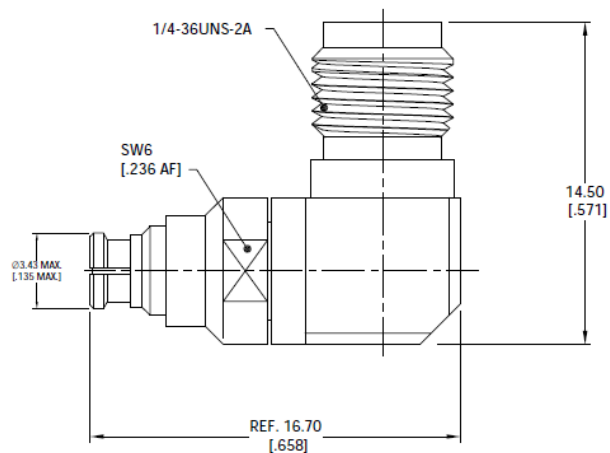

Dimensions in mm. All specifications are subject to change without notice.