



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS

Between Series


Model RMAD.BS.SMPSMAmfFa

SMP to SMA 2-hole flange

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	$<0.15+0.02xf(\text{GHz})$	50Ω	1.30:1 max

Notes:

- Material:**
 Body: stainless steel/passivate
 Contacts: BeCu/gold
 Dielectric: PTFE
- Operation temperature:** -55°C to +165°C
- 100 mating cycles typ

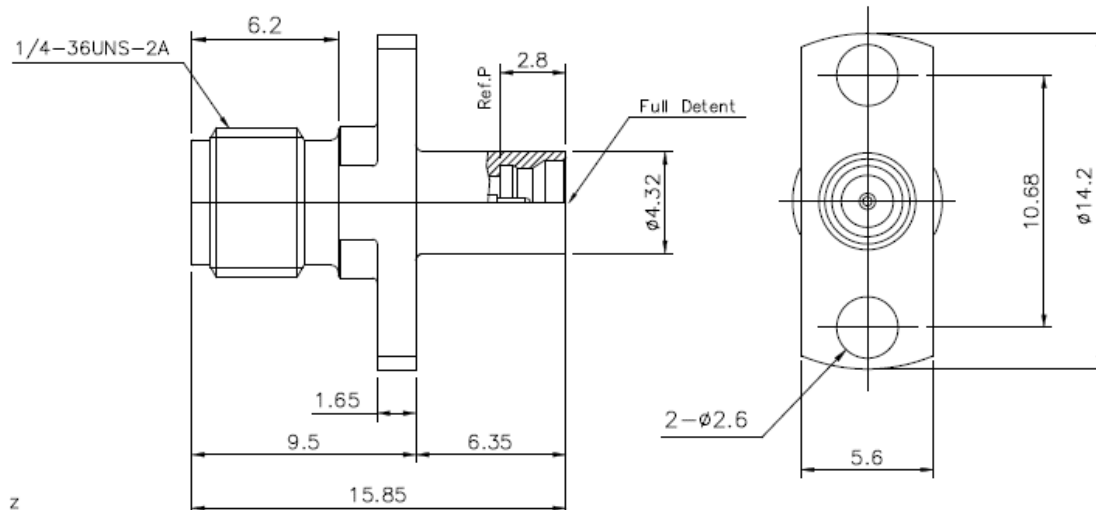

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com