



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.TNCSMA27ff

Between Series - TNC to SMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50Ω	1.15:1 max

Notes:

- a. Material:
 - 1 = Body: SUS303/passivate
 - 2 = Contacts: BeCu/gold
 - 3 = Dielectric: PTFE
- b. Operation temperature: -55°C to +125°C
- c. Interface: per MIL-C-83517

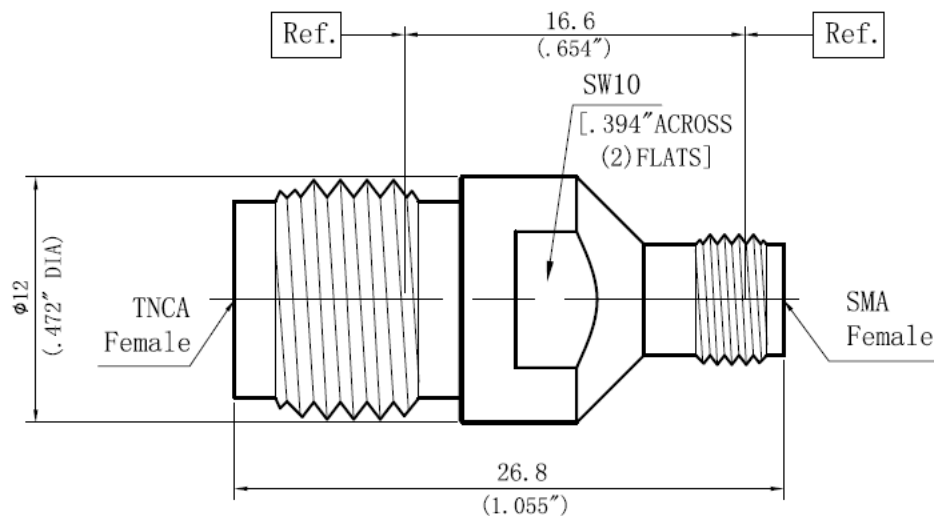

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com