



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS

Waveguide/Coax Series


Model RMAD.BS.WR112Sf

Between Series – SMA to WR112

Frequency	Insertion Loss	Impedance	VSWR	Power
7 – 10GHz	0.2dB typ	50 Ω	1.25:1 max	50W CW

Notes:

- a. Material:
 - Body: aluminum/golden iridite
 - Contacts: BeCu/gold
 - Dielectric: PTFE
- b. Operation temperature: -30°C to +85°C
- c. Flange: UBR84
- d. Connector: SMA female

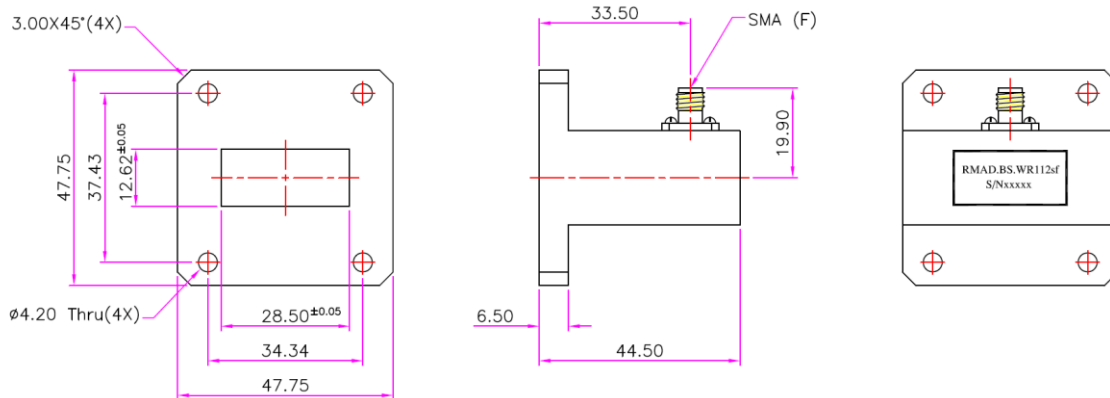

Dimensions in mm. All specifications are subject to change without notice.