94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS

Model RMAD.BS.WR75SMAf Between Series – SMA to WR75

Frequency	Insertion Loss	Impedance	VSWR	Power
10–15GHz	0.15dB max	50 Ω	1.25:1 max	50W CW

Notes:

a. **Material:**
   - **Body: brass/golden iridite**
   - **Contacts: BeCu/gold**
   - **Dielectric: PTFE**

b. **Operation temperature: -30°C to +85°C**

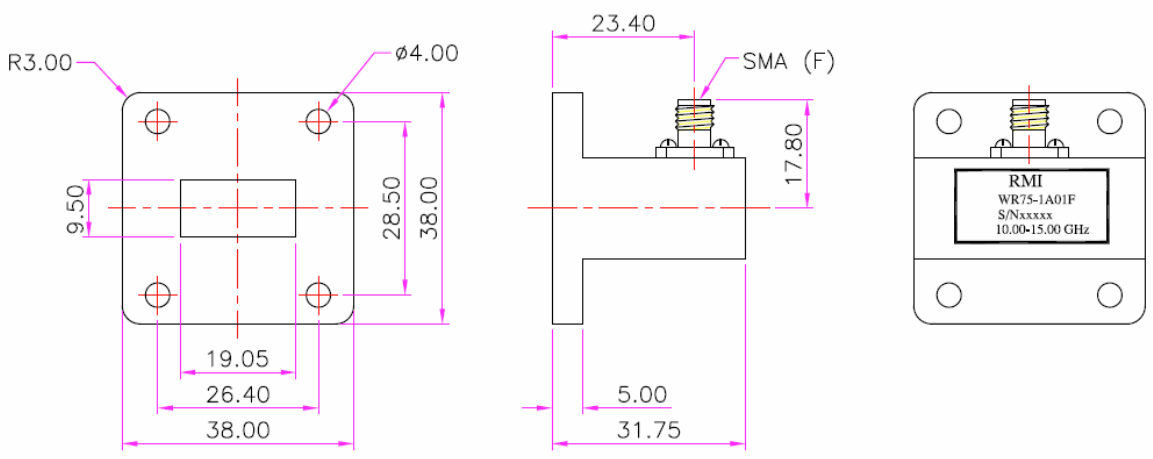

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com