



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS

Waveguide/Coax Series


Model RMAD.BS.WR112Nf

Between Series – N to WR112

Frequency	Insertion Loss	Impedance	VSWR	Power
7 – 10GHz	0.2dB typ	50 Ω	1.10:1 max	50W CW

Notes:

- Material:
Body: aluminum/golden iridite
Contacts: BeCu/gold
Dielectric: PTFE
- Operation temperature: -30°C to +85°C
- Flange: CPR-112G, PDR84
- Connector: N female

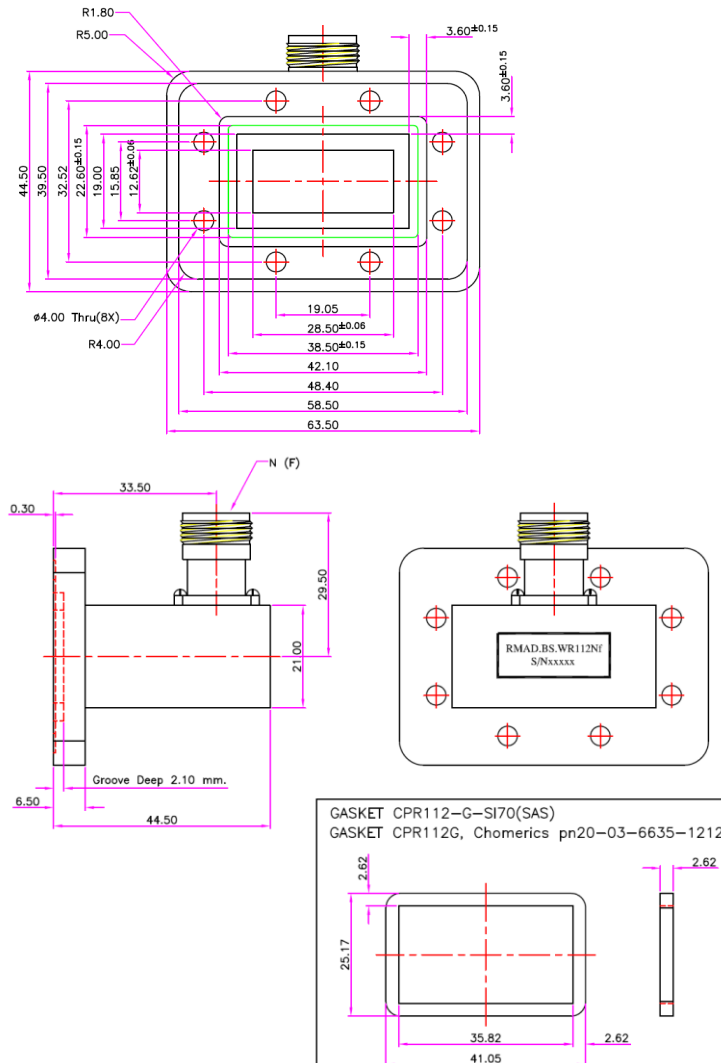

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com